



MWM X-Change gensets

Anticipated to be no more than 4 days of plant downtime for maintenance.

MWM X-Change gensets

The speedy alternative

E70 maintenance imminent? With MWM's fully refurbished X-Change gensets, you can now re-commission your plant within a very short time in order to return to profitable operation. For this purpose, we refurbish used gensets with genuine OEM parts, restoring them to the state of the art and allowing you to benefit from a 12-month warranty.

X-Change gensets at fixed prices

The MWM service offers refurbished X-Change gensets for TCG 2016 and TCG 2020 according to the latest manufacturer specifications at attractive fixed prices.



Prior to the repair

This offering for the overhaul of cogeneration power plants with TCG 2016 and TCG 2020 gensets is exclusively presented by MWM Service Centers and takes place according to the latest manufacturer specifications at attractive fixed prices.

Minimum downtime

To ensure seamless operation and to minimize the plant downtime, the gensets are ready for operation after a downtime of only 3-4 days. For this purpose, an identical X-Change genset that has been overhauled according to the latest manufacturer specifications is prepared and delivered to the plant with a fully assembled refurbished engine, generator, and base frame. There, the replacement, the integration in the existing setting, and the commissioning take place in one go.

Overview of the offering

- ✓ Anticipated to be no more than 4 days of plant downtime for E70 maintenance
- ✓ General overhaul of engine, frame, coupling, and generator
- ✓ Use of original MWM X-Change short blocks and cylinder heads
- ✓ Use of genuine MWM new and X-Change spare parts and manufacturer rebuild components
- ✓ 12-month warranty without any cap on operating hours
- ✓ Maintenance and modernization according to the latest manufacturer specifications



Refurbished X-Change genset

Overhaul with manufacturer warranty

Only genuine MWM new and X-Change spare parts and manufacturer rebuild components are used for the overhaul. Additionally, the entire engine wiring is replaced.



Quality control prior to delivery



After 3-4 days, the MWM X-Change genset is ready to use (technically up to date and newly painted)

Disassembly of the old genset

Preparation of the new genset for replacement on the day of delivery
Fluid drain, removal from the peripherals and clearing.

Delivery of the X-Change genset

Delivery of the entire X-Change genset to the site
Provision of hoisting gear and transportation for the replacement
Removal of the old genset.


96 h

Check and commissioning

Plant check, subsequent re-commissioning 100% load run and handover to the customer.

Installation and connection

Installation of the new X-Change genset
Alignment and connection to peripherals
Filling of the fluids and electrical installation.

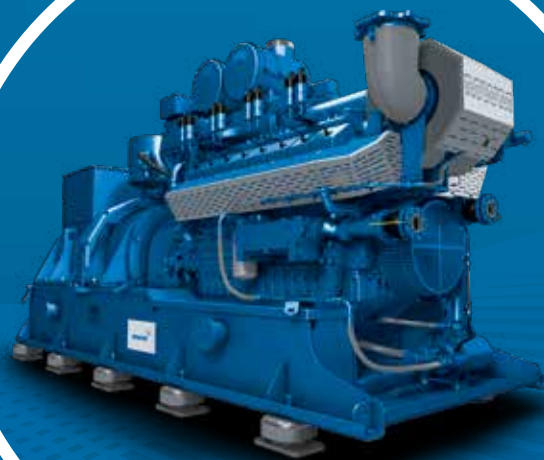

Contact us.

We will be pleased to assist you.

Supported by

MWM X-Change Center Duisburg

x-change@mwm.net

MWM Service | Caterpillar Energy Solutions GmbH | Carl-Benz-Str. 1 | 68167 Mannheim
T +49 621 384-0 | F +49 621 384-8800 | info@mwm.net | www.mwm.net

The details presented in this document are for information only and are not binding.
Only the details specified in the offer are authoritative.