

MWM GmbH
Carl-Benz-Straße 1
DE-68167 Mannheim
T +49 621 384-0
F +49 621 384-8800
info@mwm.net

MWM Energy Hungaria Kft.
Ezred u.1-3
HU-1044 Budapest
T +43 5242 21300
F +43 5242 21300-600
info-hungaria@mwm.net

MWM Benelux B.V.
Soerweg 13
NL-3088 GR Rotterdam
T +31 10 2992-666
F +31 10 2992-677
info-benelux@mwm.net

MWM Latin America Soluções
Energéticas Ltda.
Av. Dr. José Bonifácio C. Nogueira
214 sala 418
BR-CEP 13091-611 Campinas/SP
T +55 19 3396-5777
info-latin-america@mwm.net

MWM Moscow Rep. Office
Bldg. 1, 5/2, 1st Kazachiy per.
RU-119017 Moscow
T +7 495 234 4941
info-moscow@mwm.net

MWM Energy Australia Pty. Ltd.
21 McDonalds Lane
AU-3170 Mulgrave, Victoria
T +61 3 9262-3000
F +61 3 9262-3033
info-energy-australia@mwm.net

MWM Austria GmbH
Münchner Straße 22
AT-6130 Schwaz
T +43 5242 21300
F +43 5242 21300-600
info-austria@mwm.net

MWM Beijing Co. Ltd.
Room 2-02, CITIC Building Tower A,
No. 19 Jianguomen Wai Dajie
Chaoyang District,
Beijing, 100004, P.R. China
T +86 10 6528 5116
F +86 10 6528 9316
info-mwm-beijing@mwm.net

MWM France SAS
Péripark Gennevilliers
99/101 Avenue Louis Roche Bât E5
FR-92230 Gennevilliers
T +33 14790 7780
F +33 14790 7781
info-france@mwm.net

MWM Energy España S.A.
Avda de los Artesanos, 50
ES-28760 Tres Cantos/Madrid
T +34 91 80745-00
F +34 91 80745-07
mwm.energy-espana@mwm.net

MWM of America, Inc.
1750 Breckinridge Parkway
Suite 500
US-Duluth, GA 30096
T +1 770 279 6720
F +1 770 279 6719
info-america@mwm.net

MWM Korea Rep. Office
Rm. No. A-1706
Maposinyoung Gwell
461 Kong-Duk-Dong
Mapo-Ku
Seoul, Korea
T +82 2 2123 9831/2
F +82 2 2123 9833
info.mwmap@mwm.net

MWM Asia-Pacific Pte. Ltd.
11 Kian Teck Road
SG-628768 Singapore
T +65 6268 5311
F +65 6266 3039
info-asia-pacific@mwm.net



TCG 2020 V12 K1

Highly flexible, efficient and profitable


- PROFIT
- SERVICE
- RELIABILITY
- PERFORMANCE

We assume responsibility:
This product was printed on PEFC-certified paper with mineral oil-free printing ink.



High efficiency at low investment costs

More Profit



The TCG 2020 V12 K1 is optimized for natural gas applications with a methane number down to 70. With its adapted alternator, j-gap spark plugs and crankcase breathing the generator set provides high efficiency on low operational costs.

Flexible usage



Fast start up and shut down of the power plant is possible due to only 7 loadsteps. Reliable power supply wether in island mode, parallel to the grid or for blackstart properties is ensured.

Wide range of applications



Due to the advanced turbocharger technology the TCG 2020 V12 K1 can provide full output between 25°C and 40°C ambient air temperature and also on altitudes from 0m to 1500m.

Optimum control concept




TEM (Total Electronic Management) controls not just the engine but the intire system including the heat supply from cogeneration. Temperature monitoring for each cylinder and anti-knock control ensure the best possible utilization of fuel and maximum power output.

Customer oriented maintenance



Project specific on-demand maintenance ensures low operational costs and high availability of the generator sets. The power plant only has to be shut down twice a year (4000h) for scheduled maintenance.

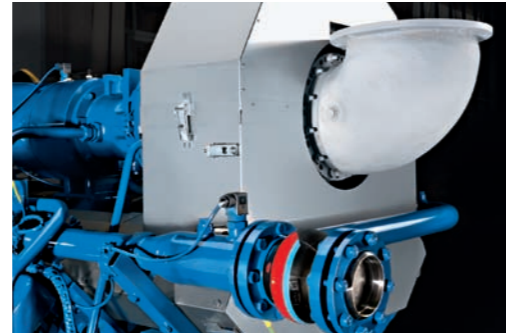

Technical data 50 Hz


Natural gas applications

$NO_x \leq 500 \text{ mg/m}_n^3$ dry exhaust manifolds

Engine Type	TCG 2020 V12 K1	
Bore/stroke	mm	170/195
Displacement	dm ³	53,1
Speed	min ⁻¹	1500
Mean piston speed	m/s	9,8
Length	mm	4636
Width	mm	1802
Height	mm	2210
Dry weight genset	kg	10200

Engine Type	TCG 2020 V12 K1	
Electrical power ¹⁾	kW	1000
Mean effective pressure	bar	15,5
Thermal output ²⁾	±8% kW	1191
Electrical efficiency	%	40,0
Thermal efficiency	%	47,6
Total efficiency	%	87,6

Product Range: Gas

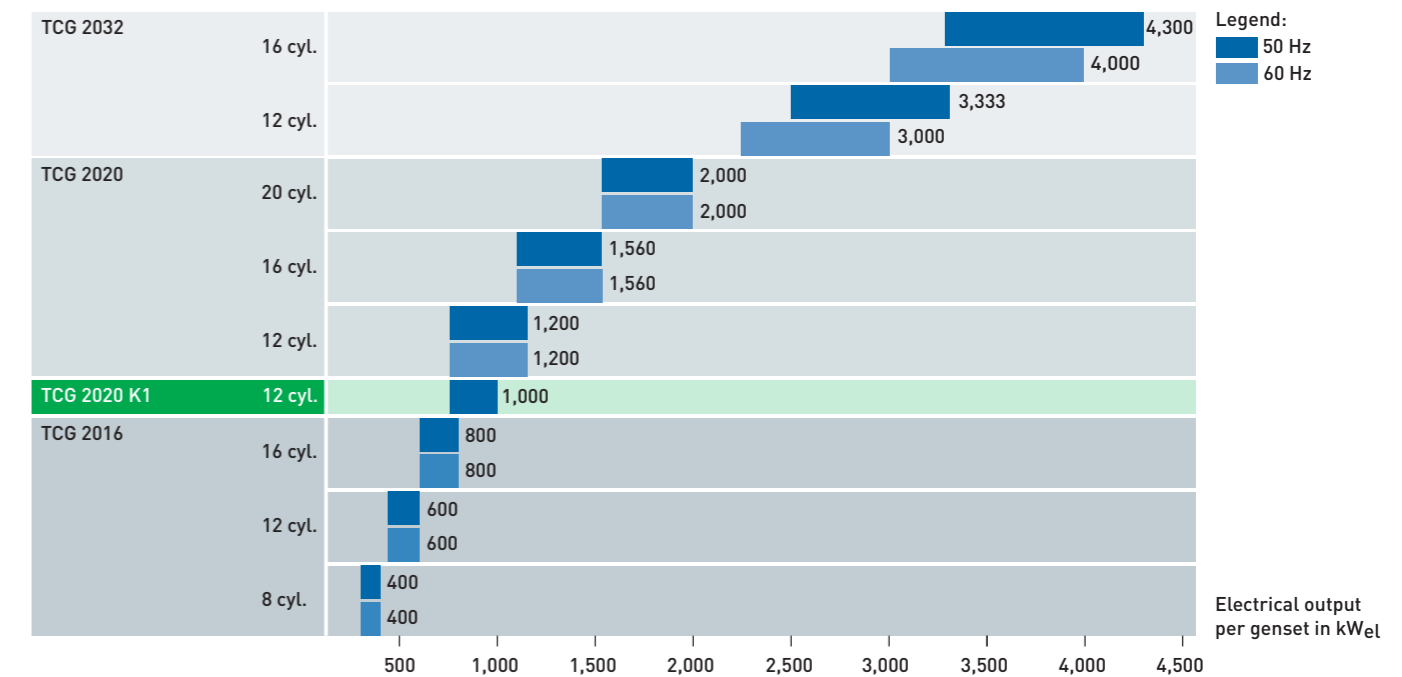

With our gensets we can cover a power range from 300 kW_{el} to more than 100 MW_{el} for decentralized power production.

The improved new generator set K1 for the 1 MW class has an electrical output of 1.000 kW_{el} and an electrical efficiency of 40,0%.

1) Electrical Output as define DIN ISO 3046; cosphi = 1.0, generator voltage of U = 0,4 kV at 50 Hz and a minimum methane number of MN70 for natural gas.

2) Exhaust gas cooled to 120°C with natural gas. Data for special gas and dual gas operation on request.

The values given in this data sheet are for information purposes only and not binding. The information given in the offer is decisive.